



Architectural Slabs

Architectural Slabs are stunning in any setting and ideal as pedestrian pavement surfaces. They can be sand-set or pedestal-set depending on your project's needs. Mutual Materials® slabs are produced to exacting standards for a product that is strong, beautiful and durable. The top edges are chamfered for a finished look.


Available are Vancouver Bay with a shot-blast finish, Diamond Lake with exposed marble and granite chips, or Glacier Slate with a rippled surface.

Architectural Slabs are perfect for residential, municipal and commercial applications, including:


- Patios
- Pedestrian areas
- Plazas
- Pool decks
- Roof decks
- Sidewalks
- Terraces
- Walkways



24 x 24

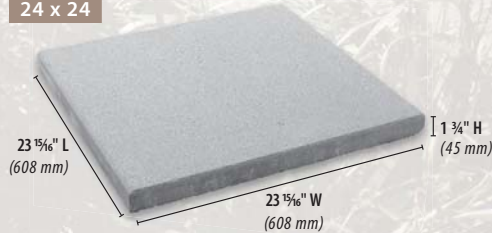

18 x 18

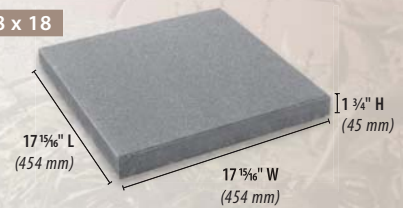

STANDARD SIZES


PRODUCT	ACTUAL SIZE	COVERAGE		PACKAGING	WEIGHT	
		SF (m ²)/UNIT	SF (m ²)/PALLET	PIECES/PALLET	PER UNIT	PALLET
Vancouver Bay 24 x 24	23 15/16" x 23 15/16" x 1 3/4" (608 mm x 606 mm x 45 mm)	4.0 (0.37 m ²)	112 (10.4 m ²)	28	90 (40.8 kg)	2500 (1,143 kg)
Vancouver Bay 18 x 18	17 15/16" x 17 15/16" x 1 3/4" (454 mm x 454 mm x 45 mm)	2.25 (0.21 m ²)	126 (11.7 m ²)	56	45 (20.4 kg)	2500 (1,143 kg)
Glacier Slate 24 x 24	23 15/16" x 23 15/16" x 1 3/4" (608 mm x 608 mm x 45 mm)	4.0 (0.37 m ²)	112 (10.4 m ²)	28	90 (40.8 kg)	2500 (1,143 kg)
Diamond Lake 24 x 24	23 15/16" x 23 15/16" x 1 3/4" (608 mm x 608 mm x 45 mm)	4.0 (0.37 m ²)	112 (10.4 m ²)	28	90 (40.8 kg)	2500 (1,143 kg)

INSTALLATION METHODS: SAND SET

Sand-set Applications:

Whether you're designing a walkway, plaza, courtyard, fountain or pool deck, architectural slabs meet your functional and aesthetic needs. Combine slabs with our concrete pavers or segmental retaining walls to create truly unique spaces.

Sand-set installation can be used when existing soil is well drained and stable. Proper compaction of aggregate base and bedding sand is critical to prevent settling and movement of the slabs after installation. To prevent instability, bedding sand should not be thicker than 1". Joints should be 1/8" to 1/16" and swept with sand. Units can also be set further apart to accommodate pea gravel, ground cover, etc. Do not use compaction equipment on slab surfaces.

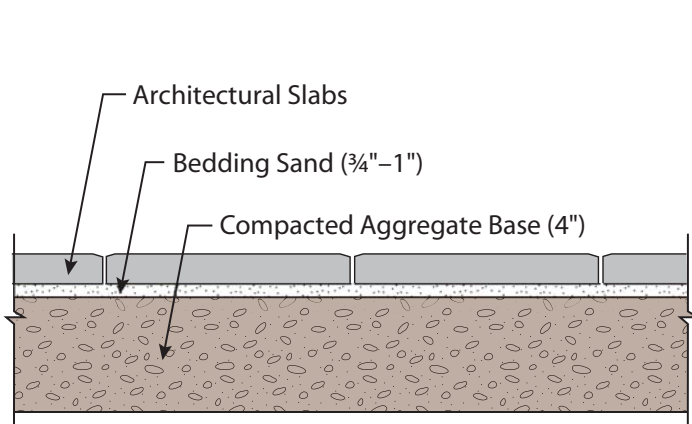

INSTALLATION METHODS: PEDESTAL SET


Pedestal-set Applications:

Architectural Slabs provide better use of uneven surfaces, such as roofs and decks. Slabs are attractive, as well as functional when used with a pedestal system.

Pedestal installation is ideal for use over sloped areas. Water drains through the joints to access the drainage system while the slabs protect the valuable waterproof membrane. The slabs can easily be removed and replaced to allow access for repair and maintenance to the roof system below.

See ICPI Tech Spec #14 for detailed design and installation information.

DO NOT PEDESTAL SET EXPOSED AGGREGATE.

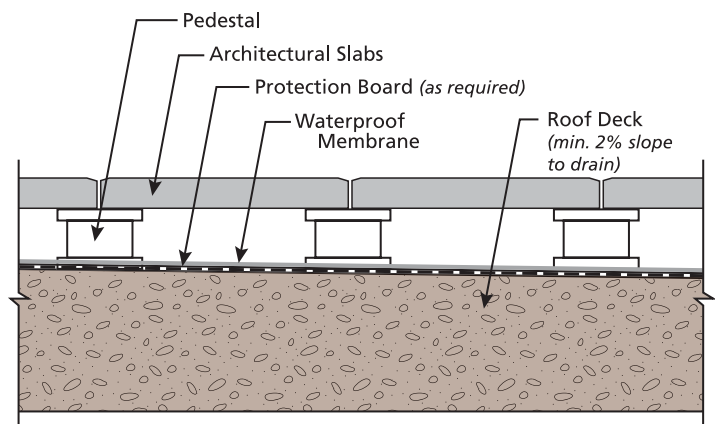

AVAILABLE COLORS

For more information regarding custom colors, please contact a Mutual Materials sales representative. Custom colors may be restricted by the size of the order or project.

PHYSICAL PROPERTIES

Mutual Materials' slabs comply with the requirements of the Canadian Standards Association, CSA A231.1-06.

Flexural Strength	650 psi (4.5 MPa)
Compressive Strength	8,000 psi (55.1 MPa)
Freeze-Thaw (Scaling)	Per CSA A231.1-06, Section 6.1.2
Dimensional Tolerance (Length & Width)	-1/16" (1 mm) to + 3/32" (2 mm)
Dimensional Tolerance (Thickness)	+/- 1/8" (3 mm)

MUTUAL MATERIALS LOCATIONS

For product information and customer service, call 1-888-MUTUALØ (688-8250).

Washington

Auburn
Bellevue
Bellingham
Burlington
Mukilteo
Olympia (Tumwater)

Oregon

Bend
Clackamas
Durham
Hillsboro
Salem

Idaho

Hayden

Montana

Missoula



**MUTUAL
MATERIALS**[®]
Trusted Since 1900

www.mutualmaterials.com